



502



A601



A702

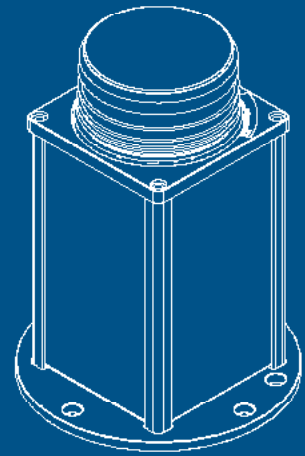

| DIMENSIONS | |
|------------|----------------|
| Height | 4.4" (113 mm) |
| Width | 6.05" (154 mm) |

| SPECIFICATIONS | |
|------------------------------------|-----------------------------------|
| LIGHT OUTPUT AND OPERATION | |
| Flashing | ~1.2 cd |
| Vertical divergence | — |
| Autonomy (flashing) at full charge | 300 hours |
| Available LED colour | Red, green, blue, amber, or white |
| Coloured lens option | Yes |
| Ambient Operating Temperature | -22 to 122 °F (-30 to 50 °C) |
| Ambient Storage Temperature | -40 to 176 °F (-40 to 80 °C) |
| Programmable | Infrared |

| CONSTRUCTION | |
|-------------------------------|------------------|
| Battery (average 5-year life) | Non-replaceable |
| Mounting options | 2 Bolt |
| Weight | 2.45 lb (1.1 kg) |
| Waterproof | Yes |

| ACCESSORIES | |
|-------------|--|
| | Infrared Programmer Security Bolt Mounting plate |

| DIMENSIONS | |
|------------|----------------|
| Height | 5.51" (140 mm) |
| Width | 6.87" (175 mm) |

| SPECIFICATIONS | |
|------------------------------------|----------------------------------|
| LIGHT OUTPUT AND OPERATION | |
| Flashing | ~11 cd |
| Steady ON | ~4 cd |
| Vertical divergence | 0 to 6° |
| Autonomy (flashing) at full charge | 300 hours |
| Available LED colour | Red, green, amber, blue or white |
| Coloured lens option | Yes |
| Ambient Operating Temperature | 22 to 122 °F (-30 to 50 °C) |
| Ambient Storage Temperature | -40 to 176 °F (-40 to 80 °C) |
| Programmable | Infrared |

| CONSTRUCTION | |
|-------------------------------|------------------|
| Battery (average 5-year life) | Non-replaceable |
| Mounting options | 3 bolt |
| Weight | 4.85 lb (2.2 kg) |
| Waterproof | Yes |

| ACCESSORIES | |
|-------------|---|
| | Infrared Programmer Security Bolt Mounting Plate Bird Deterrent Frangible Coupling Stake Mounting System Stake Tapper |

| DIMENSIONS | |
|------------|----------------|
| Height | 13" (330 mm) |
| Width | 9.25" (235 mm) |

| SPECIFICATIONS | |
|------------------------------------|--|
| LIGHT OUTPUT AND OPERATION | |
| Flashing | ~18 cd |
| Steady ON | ~6 cd |
| Vertical divergence | 0 to 6° |
| Autonomy (flashing) at full charge | 300 hours |
| Available LED colour ³ | Red, green, amber, blue Infrared Split lens (Red/Green or Amber/White) |
| Coloured lens option | Yes |
| Ambient Operating Temperature | -22 to 122 °F (-30 to 50 °C) |
| Ambient Storage Temperature | -40 to 176 °F (-40 to 80 °C) |
| Programmable | Infrared, Push button |

| CONSTRUCTION | |
|-------------------------------|----------------------------|
| Battery (average 5-year life) | Replaceable and recyclable |
| Mounting options | 3 or 4 bolt |
| Weight | 17 lb (7.75 kg) |
| Waterproof | Yes |


| ACCESSORIES | |
|-------------|--|
| | Infrared Programmer Mounting Bolt Kit Mounting plate Frangible Coupling Stake Mounting System Stake Tapper Unidirectional Shield |

All specifications are subject to change without notice.


² Warm white casts a light that is slightly yellow and warmer in tone than pure white; please specify whether you require warm or pure white version at time of ordering.

³ All specifications are subject to change without notice. Bi-color (split-lens) A704-5 lights emit light of one color to one side, and light of a different color to the other side.

A702-5

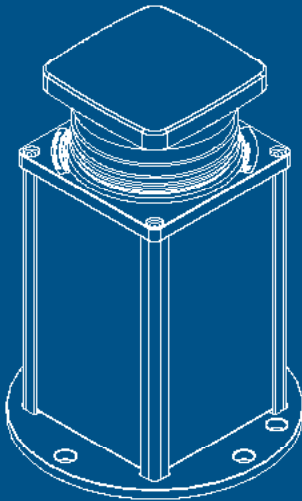

A704-5

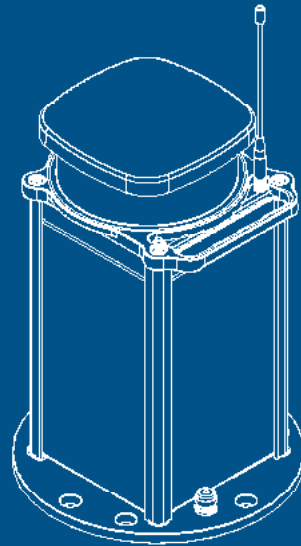

Windsock



DIMENSIONS

| | |
|--------|------------------|
| Height | 13.375" (340 mm) |
| Width | 9.25" (235 mm) |

SPECIFICATIONS

LIGHT OUTPUT AND OPERATION

| | |
|------------------------------------|----------------------------------|
| Flashing | 13 cd |
| Steady ON | 18 cd |
| Vertical divergence | 0° to 6° |
| Autonomy (flashing) at full charge | 150 hours |
| Available LED colour | Red, green, amber, blue or white |
| Coloured lens option | No |
| Ambient Operating Temperature | 22 to 122 °F (-30 to 50 °C) |
| Ambient Storage Temperature | -40 to 176 °F (-40 to 80 °C) |
| Programmable | Infrared, Push button |

CONSTRUCTION

| | |
|-------------------------------|----------------------------|
| Battery (average 5-year life) | Replaceable and recyclable |
| Mounting options | 3 or 4 bolt |
| Weight | 17 lb (7.75 kg) |
| Waterproof | Yes |

ACCESSORIES

| | |
|--|---|
| | Infrared Programmer Mounting Bolt Kit Mounting plate Frangible Coupling Stake Mounting System Stake Tapper Bird Deterrent |
|--|---|

DIMENSIONS

| | |
|--------------------------|------------------|
| Height (with antenna) | 17.6" (448 mm) |
| Height (without antenna) | 13.375" (340 mm) |
| Width | 9.25" (235 mm) |

SPECIFICATIONS

LIGHT OUTPUT AND OPERATION

| | |
|------------------------------------|---|
| Flashing | — |
| Steady ON | 44.3 cd Auto-high |
| Vertical divergence | 0° to 30° |
| Autonomy (flashing) at full charge | 350 hours |
| Available LED colour 2,3 | Warm White Cool White Red, Green, Red/Green Red/Warm White Amber/Warm White Amber/Cool White |
| Ambient Operating Temperature | -22 to 122 °F (-30 to 50 °C) |
| Ambient Storage Temperature | -40 to 176 °F (-40 to 80 °C) |
| Wireless Radio Receiver | 902-928 MHz FHSS |
| External Service Port | 12 V DC |
| Programmable | Hand-held controller, Push button |

CONSTRUCTION

| | |
|-------------------------------|----------------------------|
| Battery (average 5-year life) | Replaceable and recyclable |
| Mounting options | 3 or 4 bolt |
| Weight | 26 lb (11.75 kg) |


ACCESSORIES

| | |
|--|--|
| | Hand-held Controller AC/DC Charger Mounting Bolt Kit Mounting plate Frangible Coupling Stake Mounting System Stake Tapper Bird Deterrent Unidirectional Shield |
|--|--|

Please contact Carmanah for more information on our Solar-Powered Illuminated Windsock.

An essential airfield and helipad accessory, windsocks are required to be lit on every airfield and helipad worldwide. Used to help pilots better determine wind direction from a greater distance, windsocks increase the safety of landings at night and in low-visibility conditions.

Distributore per l'Italia:



SARTELCOTM SISTEMI SRL

Via Torri Bianche,1
20059 Vimercate (MB)
Tel. +39-039-62905.1 Fax. +39-039-62905.99
e-mail: sistemi@sartelco.it
www.sartelco.it

Please contact Carmanah for more information on our Solar LED Airfield Sign Light.

Carmanah Solar LED Airfield Sign Lighting delivers consistent, reliable spotlighting to improve the visibility and legibility of on-airfield signs and distance-to-go markers. With no connection to the electrical grid, Carmanah solar airfield sign lighting provides for increased safety on every corner of an airfield.